


CE RoHS IP 66

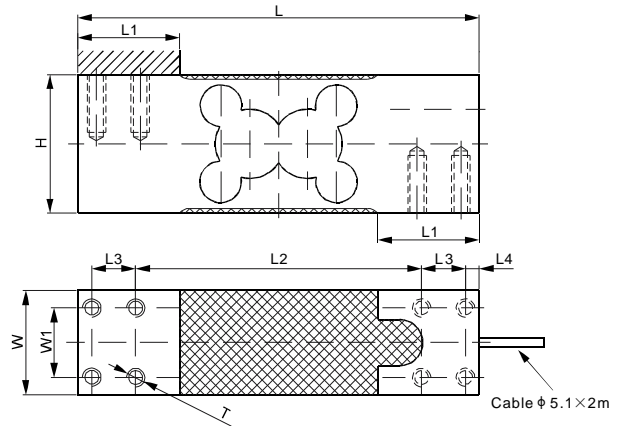

尺寸

量程	H	L	L1	L2	L3	L4	W	W1	T
kg/mm 60...750	60.0	174.0	44.0	124.0	19.0	6.0	45.0	30.0	8-M8 Depth25
lb/inches (由上述尺寸转换) 132.28...1,653.47	2.36	6.85	1.73	4.88	0.75	0.24	1.77	1.18	8-M8 Depth0.98

技术参数

相关量程	kg	60; 100; 200; 300; 500; 600; 750
产品毛重	kg/lb	-
推荐最大台面尺寸	mm	600×700
灵敏度	mV/V	2 ± 10%
零位输出	mV/V	± 0.02
非线性	%	< ± 0.017
重复性	%	< ± 0.017
滞后误差	%	< ± 0.017
蠕变	%	< ± 0.017
阻抗	Ω	415 ± 15
额定激励电压	V(DC/AC)	10 (15V 最大)
绝缘阻抗	GΩ	> 1 [ 50 VDC ]
正常工作温度范围	°C/°F	-10...40 / 14...104
安全极限载荷	% of full scale	150
破坏极限载荷	% of full scale	300
密封方式		密封, IP66

